



PASSIVE INFRARED DETECTOR
W/ PET TOLERANCE

RX-40PT




QUAD ZONE LOGIC

Optex improves its patented "Multifocus Optics" technology to create "Quad Zone Logic" for accurate detection of humans. Using this logic, the RX-40PT has been designed to give extremely high false alarm protection with tolerance to spot temperature changes from curtains or small to medium size animals.

Optex's Optical Quad Technology uses taller detection zones divided into upper and lower areas. It detects IR energy changes in both areas and then couples them for extremely accurate detections, offering very high reliability in hostile areas.

Passive Infrared Detector w/Pet Tolerance

RX-40PT

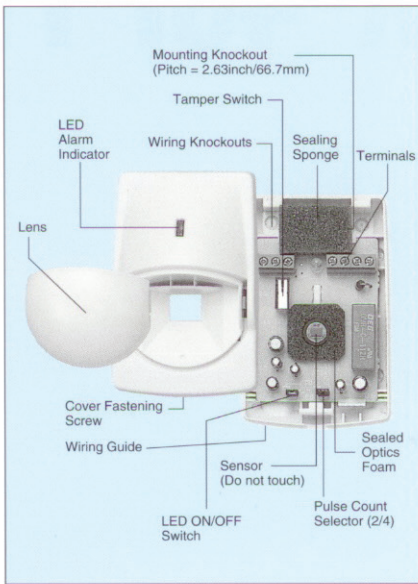


FEATURES

TECHNOLOGY FOR HIGHEST RELIABILITY

●Quad Zone Logic - Improved Patented Technology


Quad Zone Logic provides multi segmented detection zones over the detection area. An alarm signal is created by the cumulated total IR energy of each zone. It is designed so that a human size target will normally fill 4 to 8 zones, and this will cause an alarm to be generated. Any smaller temperature change (i.e. small to medium size pets, rodents or moving curtains) only activates one or two zones at the same time creating a much weaker detection signal. These signals are further analyzed by the "ECO" Chip and signal processing circuit for accurate detection of humans and avoidance of most small animals.

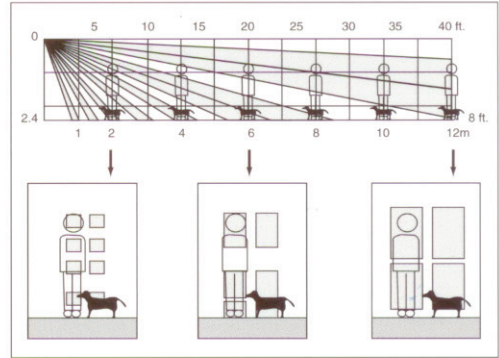

●Spherical Lens

- Technology to Back Up Quad Zone Logic


Obtains an accurate focal length for each detection zone and maximises the performance of Quad Zone Logic.



TROUBLE-FREE & EASY INSTALLATION


●Sealed Housing

Prevents drafts and insects from reaching the pyro element.



●Trouble-Free & Easy Knockouts

Simply push with a screwdriver to open a hole of matching size with the cables.



●Durable Spherical Lens and Housing Design

●Good Wiring Space and Guide

●Selectable Pulse Count : 2 or 4


●LED On/Off Switch

PERFORMANCE

●RFI Protection

No alarm at 20V/m from 100MHz to 1 GHz

●Optional Multi-Angle Bracket

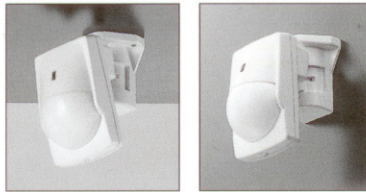

●Temperature Compensation Logic

Eco chip includes temperature compensation circuit. It controls sensitivity to improve stability against changes in environmental conditions.



FA-3

Wall & Ceiling Mounting Bracket
Horizontally ±45°, Vertically 0° to 15° downwards

FL-60N

Long Range (Extremely Dense Multi Layer Curtain Lens)
(Pet Immunity is not available with FL-60N)

DETECTION PATTERNS

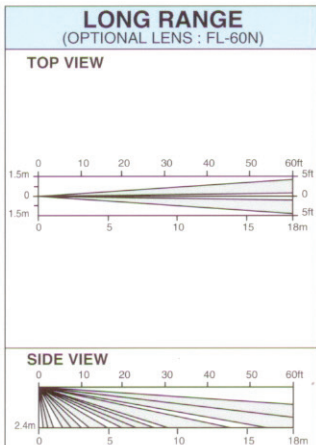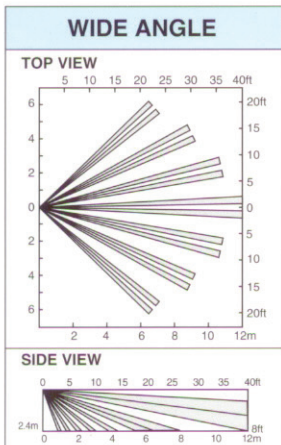


SPECIFICATIONS

Model	RX-40PT
Detection Method	Passive Infrared
Coverage	Wide: 12m x 12m (40ft x 40ft), 85° wide
Detection Zones	Wide: 78 zones
Mounting Height	1.5 ~ 2.4m (5 ~ 8ft)
Sensitivity	2°C at 0.6m/sec. (3.6°F at 2ft/sec.)
Detection Speed	0.3 ~ 1.5m/sec. (1 ~ 5ft/sec.)
LED Alarm Indicator	Switchable On/Off
Alarm Period	Approx. 2.5 sec.
Alarm Output	N.C., 28VDC, 0.2A max.
Tamper Switch	N.C., Open when cover is removed
Pulse Count	Approx. 20 sec. 2 or 4
Warm-up Period	Approx. 30 sec.
Power Input	9.5 ~ 16VDC
Current Draw	8mA (normal), 11mA (max.) at 12VDC
Weight	70g (2.5 oz.)
Operating Temperature	-20°C ~ +50°C (-4°F ~ +122°F)
Environmental Humidity	95% max.
RF Interference	No Alarm 20V/m

*FL-60N (Optional Lens for Long Range Curtain Pattern)	
Coverage	Long: 18m x 1.8m (60ft x 6ft) Long Range
Detection Zones	Long: 20 zones

DIMENSIONS

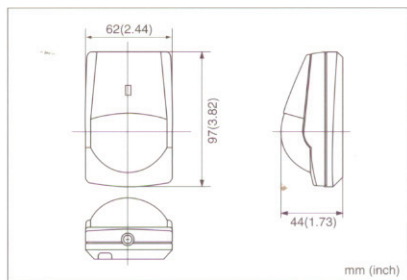

*Specifications and design are subject to change without prior notice.
NOTE: This unit is designed to detect movement of an intruder and activate an alarm control panel. Being only a part of a complete system, we can not accept responsibility for any damages or other consequences resulting from an intrusion. This product conforms to the EMC Directive. 89/336 EEC.



OPTEX CO., LTD. (ISO 9001 Certified by LRQA / ISO14001 Certified by JET)
5-8-12 Ogoto, Otsu, Shiga, 520-0101 Japan
TEL +81(0)77 579 8670 FAX +81(0)77 579 8190 <http://www.optex.co.jp/e>

OPTEX INCORPORATED (USA) <http://www.optexamerica.com>

OPTEX (EUROPE) LTD. (UK) <http://www.optexuk.com>

OPTEX SECURITY SAS (FRANCE) <http://www.optex-security.com>

OPTEX KOREA CO., LTD. (KOREA) <http://www.optexkorea.com>